

AIRCRAFT CHECK WORK SUMMARY
(Form: SCA/MTC/051)

DATE OF ISSUED	JO/WO #	TYPE OF MAINTENANCE	DATE OF ACCOMPLISHED		
21 Jun 2023	WO/044-SNA/VI/2023	Inspection 800Hrs & Add Task			
A/C Type		Mfg. Serial Number	A/C Registration		
C208B		C208B-5634	PK-SNA		
AIRCRAFT DATA					
Subject	Pos #	Serial Number (SN)	TTSN/TCSN		
Engine	#1	PCE-VA0730			
	#2	-			
Propeller/Rotor	#1	200483			
	#2	-			
Landing Gear	NLG				
	LH MLG				
	RH MLG				
PACKAGE COVERED					
No	Subject	Qty	Remark		
1	Non-Routine Card	2	#01, #02		
2	Inspection Card	1			
3	Work Order	1			
4	Summary Inspection List	1			
5	Material and Tool List	1			
6	Escalation form				
7	CRS (SMI / Unscheduled Maintenance)	1			
INSPECTION CARD (IC) LIST (Finding during maintenance)					
No	Taskcard Ref	Subject	Status		Name/ Sign & Stamp
			Open	Close	
<u>IC-001</u>					
<u>IC-002</u>					
<u>IC-003</u>					
<u>IC-004</u>					
<u>IC-005</u>					
<u>IC-006</u>					

<u>IC-007</u>					
<u>IC-008</u>					
<u>IC-009</u>					
<u>IC-010</u>					
<u>IC-011</u>					
<u>IC-012</u>					
<u>IC-013</u>					
<u>IC-014</u>					
<u>IC-015</u>					

Prepared by :
Technical Support


.....
Dwi M.

Checked by :
Chief Maintenance


.....
Dodit

Verified by :
Chief Inspector


.....
Yanuar

Approved by :
Technical Manager


.....
Istiono



PT. SMART CAKRAWALA AVIATION

CERTIFICATE RETURN TO SERVICE

SCHEDULED MAINTENANCE INSPECTION (CRS-SMI)

A/C TYPE : CESSNA 208B

TTSN :

A/C REG : PK-SNA

TCSN :

MSN : C208B-5634

DATE :

TYPE OF INSPECTION : INSPECTION 800 HRS & ADD TASK

DUE AT : 2400 HOURS

REF : MP C208B ISSUED 01

EXCEPTION

AUTHORIZED PERSON

I hereby certify that this aircraft has been maintained accordance with CASR and Maintenance Program.
Aircraft safe and airworthy for flight

NAME	CAT	AMEL/OTR NO	SIGN&STAMP	DATE
	AIRFRAME & POWER PLANT			
	EIRA			

THE NEXT DUE TYPE OF INSPECTION :

DUE AT :

Form: SCA/MTC/049



SUMMARY INSPECTION ITEMS (Form: SCA/MTC/050)

WO Ref: WO/044-SNA/VI/2023

NO.	TASK CARD NO.	DESCRIPTION	DATE	EST MHR	NAME	STAMP
1	APPENDIX B08	PT6A-140 ENGINE GROUND RUN				
2	APPENDIX D08	PT6A-140 ENGINE 100 HOURS INSPECTION				
3	APPENDIX D09	PT6A-140 ENGINE 200 HOURS INSPECTION				
4	APPENDIX D10	PT6A-140 ENGINE 200 HOURS/6 MONTHS INSPECTION				
5	APPENDIX D11	PT6A-140 ENGINE 400 HOURS INSPECTION				
6	APPENDIX C03	200 HOURS/12 MTHS INSPECTION				
7	APPENDIX C05	400 HOURS/12 MTHS INSPECTION				
8	APPENDIX C04	400 HOURS/24 MTHS INSPECTION				
9	APPENDIX C07	800 HOURS/12 MTHS INSPECTION				
10	APPENDIX C06	800 HOURS/24 MTHS INSPECTION				
11	APPENDIX B03	12 MTHS ELT TEST				
12	APPENDIX C10	12 MONTHS INSPECTION				
13	APPENDIX C11	24 MONTHS INSPECTION				
14	NRC-01	REPLACEMENT CENTRAL AIR FILTER				
15	NRC-02	REPLACEMENT RELIEF VALVE FILTER				
16	SCA/MTC/023	EMERGENCY EQUIPMENT CHECK				

	INSPECTION CARD (Form: SCA/MTC/ 048)	TECHNICAL DEPARTMENT
---	---	---------------------------------

1. CARD #	2. JO/WO #	3. ORIGINATOR	4. CARD REF	5. DATE
6. A/C REG/MSN	7. A/C TYPE	8. TRADE	12. VENDOR ORDER #	
9. ZONE	10. STA	11. MTC TYPE		

13. DESCRIPTION/DEFECT-IF FINDING OF CPCP INSPECTION, PLEASE COMPLETE SET. 20	14 PPC/ENG	15 DATE

16. CORRECTIVE ACTION	17 MECH	18 ENG. LIC	19 DATE
Performed at A/C TT : A/C TC /LDG :			

20. CORROSION INFORMATION					
LOCATION	CAUSE OF DAMAGE				
	☐ Environment				
	☐ Internal Leakage				
CORROSION ☐ Isolated ☐ Widespread	☐ Chemical Spill				
CORROSION LVL ☐ 1 ☐ 2 ☐ 3	☐ LAV/Galley Spill				
PROPOSED ACTION ☐ Doublers	☐ Blocked Drain				
☐ Others	☐ Wet Insulation Blanket				
.....	☐ Other				

21. If the defect is RII, Please Sign this card finally by RII Inspector	INSP	DATE
NOTICE OF INSPECTOR		

22. PARTS REQUIRED						
PART DESCRIPTION	PART NO	QTY	SERIAL NO		STATUS	
			ON	OFF	CLOSE	OPEN

23. TOOLS REQUIRED			
DESCRIPTION	PART NO. / MODEL	NEXT CALIBRATION DATE	STATUS



NON ROUTINE CARD
(Form: SCA/MTC/047)

1. JO/WO #	2. DATE	3. MTC TYPE	4. A/C REG/MSN
WO/044-SNA/VI/2023		REPLACEMENT COMPONENT	PK-SNA
5. CARD #	6. ATA SPEC	7. TRADE	8. STA
#01	37		
9. ZONE	10. PANEL		

11. DESCRIPTION			
PERFORM VACUUM SYSTEM CENTRAL AIR FILTER REPLACEMENT P/N: D9-18-1 / C294502-0201			
REFERENCE	☒ AMM Ch. 37-10-00-960	☐ EMM Ch	☐ OTHER
RII (*)	☐ Y	☒ N	MHR :

12. RESULT		MECH	ENG	INSP (*)
Performed at A/C TT : A/C TC /LDG :				
FINDING	☐ Y	☐ N	ACT MHR :	DATE/TIME (DD/MM/YY)
INSPECTION CARD (IC) #				

13. PARTS REQUIRED				
DESCRIPTION	PART NO	QTY	REMARK	
			STOCK	STATUS
FILTER ELEMENT	D9-18-1 / C294502-0201	1		

14. TOOLS REQUIRED			
DESCRIPTION	PART NO / MODEL	NEXT CALIBRATION DATE	STATUS



NON ROUTINE CARD
(Form: SCA/MTC/047)

1. JO/WO #	2. DATE	3. MTC TYPE	4. A/C REG/MSN
WO/044-SNA/VI/2023		REPLACEMENT COMPONENT	PK-SNA
5. CARD #	6. ATA SPEC	7. TRADE	8. STA
#02	37		
9. ZONE	10. PANEL		

11. DESCRIPTION			
PERFORM VACUUM RELIEF VALVE FILTER REPLACEMENT P/N: B3-5-1 / C482001-0202			
REFERENCE	☒ AMM Ch. 37-10-00-961	☐ EMM Ch	☐ OTHER
RII (*)	☐ Y	☒ N	MHR :

12. RESULT		MECH	ENG	INSP (*)
Performed at A/C TT : A/C TC /LDG :				
FINDING	☐ Y	☐ N	ACT MHR :	DATE/TIME (DD/MM/YY)
INSPECTION CARD (IC) #				

13. PARTS REQUIRED				
DESCRIPTION	PART NO	QTY	REMARK	
			STOCK	STATUS
FILTER ELEMENT	B3-5-1 / C482001-0202	1		

14. TOOLS REQUIRED			
DESCRIPTION	PART NO / MODEL	NEXT CALIBRATION DATE	STATUS

VACUUM DISTRIBUTION - INSPECTION/CHECK**1. General**

- A. This section has the inspections and checks necessary to keep the vacuum distribution system in a serviceable condition.

TASK 37-10-00-960**2. Vacuum System Central Air Filter Discard**

CAUTION: Do not operate the vacuum system with the filter removed or a vacuum line disconnected. Dust and other foreign objects can enter the system and damage the vacuum operated instruments.

A. General

- (1) This task gives the instructions to discard the vacuum system central air filter.

B. Special Tools

- (1) None

C. Access

- (1) None

D. Discard the Vacuum System Central Air Filter.

- (1) Remove the vacuum system central air filter. Refer to Chapter 12, [Vacuum System Central Air Filter - Servicing](#).
 (a) Discard the filter.
 (2) Install a new vacuum system central air filter. Refer to Chapter 12, [Vacuum System Central Air Filter - Servicing](#).

E. Restore Access

- (1) None

END OF TASK**TASK 37-10-00-961****3. Vacuum Relief Valve Filter Discard**

CAUTION: Do not operate the vacuum system with the filter removed or a vacuum line disconnected. Dust and other foreign objects can enter the system and damage the vacuum operated instruments.

A. General

- (1) This task gives the instructions to discard the vacuum relief valve filter.

B. Special Tools

- (1) None

C. Access

- (1) None

D. Discard the Vacuum Relief Valve Filter.

- (1) Get access to the relief valve behind the attitude gyro.
 (2) Carefully stretch the foam element filter over the top of the retaining bezel.
 (3) Remove the filter from the relief valve and discard it.
 (4) Stretch a new relief valve filter over the top of the retaining bezel.
 (5) Make sure that the filter is secure on the relief valve.

E. Restore Access

- (1) None

END OF TASK

VACUUM SYSTEM CENTRAL AIR FILTER - SERVICING

1. General

A. The vacuum system central air filter keeps dust and dirt from entering the vacuum operated instruments.

CAUTION: Do not operate vacuum system with filter removed or vacuum line disconnected, as dust and other foreign matter may enter the system and damage the vacuum operated instruments.

B. Refer to [Chapter 5, Inspection Time Limits](#) for filter inspection intervals. Replace filter element when damaged and whenever it becomes sufficiently clogged to cause suction gage reading to drop below 4.5 inches Hg (mercury).

CAUTION: Smoking during system operation will cause premature filter clogging.

2. Servicing

A. Remove Air Filter (Refer to [Figure 301](#)).


- (1) Unscrew bolt and washer from bottom of central air filter.
- (2) Remove central air filter from filter bracket.
- (3) Inspect for damage, deterioration and contamination. Clean or replace as required.

B. Install Air Filter (Refer to [Figure 301](#)).

- (1) Seat central air filter up and into filter bracket.
- (2) Secure central air filter to filter bracket using bolt and washer.
- (3) Check central air filter for unobstructed flow. A properly functioning filter should allow a reading of at least 4.5 inches Hg (mercury) on the instrument panel suction gage.

Figure 301 : Sheet 1 : Vacuum System Central Air Filter Servicing

A22863

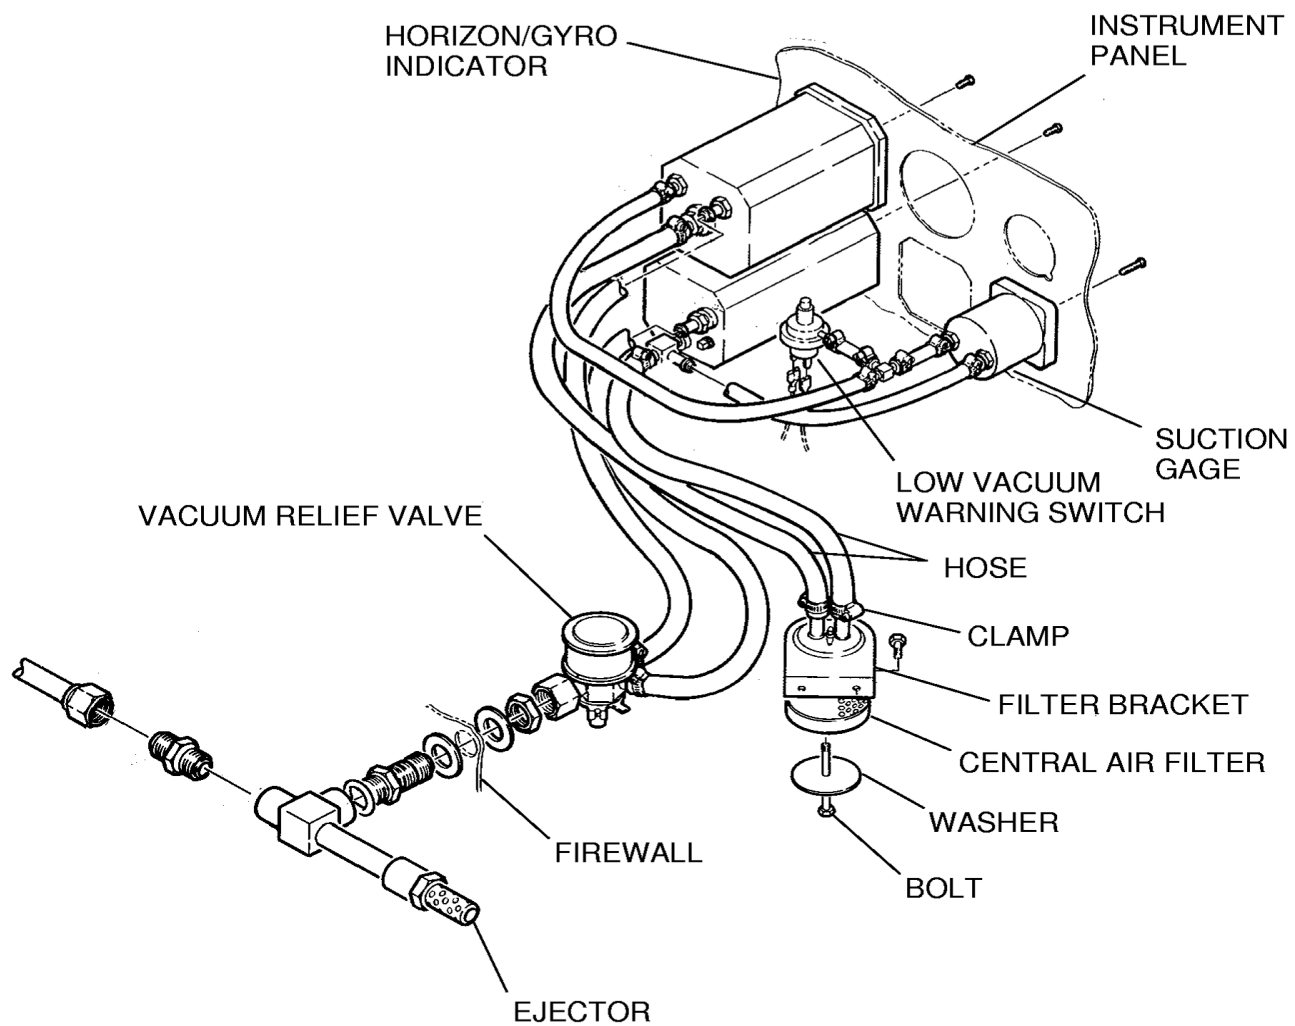

26141069



MAINTENANCE PROGRAM CESSNA 208/208B

Appendix B08 – PT6A-140 Engine Run Performance Sheet

Reg. Mark : PK - WO/FML No. :

PRE – INSPECTION	
Location	
Date	
Cycle	
Filed Barometric	
OAT	
Altitude	

POST – INSPECTION	
Location	
Date	
Cycle	
Filed Barometric	
OAT	
Altitude	

PRE – INSPECTION		
	Target	Actual
Tq		
Np		
ITT	°C	°C
Ng	%	%
Wf		
Oil Press		°C
Oil Temp		°C
Start Temp		°C

POST – INSPECTION		
	Target	Actual
Tq		
Np		
ITT	°C	°C
Ng	%	%
Wf		
Oil Press		°C
Oil Temp		°C
Start Temp		°C

Engine Run Up Checks						
Inertial ☐	EPL ☐	OVG ☐	Stby Alt ☐	BOV ☐	Brake ☐	Randomn ☐
NOTE: 1. Brake system at Torque 2000 ft-lbs. 3. EPL check can't exceed 4% Ng per second. 5. Low idle at 55.5 - 57% 40Amps. 2. Inertial Separator at Torque 400 ft-lbs. 4. Standby Alt at 80% Ng. 6. High idle at 64 - 66% Ng 40Amps						

Engine Performance Target Table (Cessna C208B EX)

OAT (°C)	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Tq (ft.lbs)	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397
Np	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
ITT (°C)	835	837	839	841	841	841	841	841	841	842	843	844	846	846	846
Ng (%)	102.7	102.7	102.7	102.7	102.7	102.7	102.7	102.6	102.6	102.6	102.6	102.6	102.6	102.6	102.5
WF (PPH)	578	578	578	578	578	578	578	570	565	565	560	560	555	548	548

Note:

1. Make sure that inertial separator in normal condition, no bleed air extracted from the engine and air condition OFF.
2. This table only applies to altitude 0-500 feet MSL. For higher altitude, refer to EMM 72-00-00.
3. Max fuel flow is 580 lb/hr fuel flow is not more than 15 lbs/hr higher than the value shown in table.
4. If parameters are outside the target performance table to EMM chapter 71-00-00.

REMARKS:

PERFORMED BY

Name	Sign & Stamp	Date	Location



EMERGENCY EQUIPMENT LIST INSPECTION & MONITOR

**PT. SMART CAKRAWALA
AVIATION
DEPARTMENT TEKNIK
Form: SCA/MTC/023**

DATE :	A/C REG : PK-SNA
A/C TYPE : C208B	CHECKER : SIGN:

No.	Description	P/N	S/N	Next Insp.	Remarks
1	Pilot Life Vest				
2	Co-Pilot Life Vest				
3	Pax Life Vest				
4	Pax Life Vest				
5	Pax Life Vest				
6	Pax Life Vest				
7	Pax Life Vest				
8	Pax Life Vest				
9	Pax Life Vest				
10	Pax Life Vest				
11	Pax Life Vest				
12	Pax Life Vest				
13	Firt Aid Kit				
14	Crash Axe Installed				
15	Fire Extinguisher				
16	Life Raft (If Installed)				
17	Survival Kit (If Installed)				
OTHERS					



Additional Work Sheet 800 Hours & Add. Task Inspection

Aircraft Registration: **PK-SNA**

WO# Nr: **WO/044-SNA/VI/2023**

Parts Used Sheet

Special Tool Used

[illegible]



Additional Work Sheet 800 Hours & Add. Task Inspection

Aircraft Registration: **PK-SNA**

WO# Nr: **WO/044-SNA/VI/2023**

Parts Used Sheet

Part Used

[illegible]