



PT. SMART CAKRAWALA AVIATION

WORK ORDER

Form: SCA/MTC/030

Subject : Inspection 400Hrs, Add.Airframe Insp. & 100 Hrs Engine	No.	WO/052-SNS/V/2023
	Date	12 May 2023
	A/C Reg.	PK-SNS C208B-2341
Reference : MP C208B Issued 01	Prepared By	TS
	Checked By	CI
	Approved By	TM
To : Engineer In Charge		

Description :

1. Perform Inspection 400 Hrs, Add.Airframe Insp. & 100 Hrs Engine.
2. Make an entry in Maintenance Log.
3. Return the Completed Work Order and Form to PPC.

#If any finding, please close the routine card, and transferred to inspection card.

Additional Work :

Compliance Statement	Sign & Date Company Lic. No.: (Engineer In Charge)	Signature (Technical Manager)
----------------------	--	--------------------------------------

AIRCRAFT CHECK WORK SUMMARY
(Form: SCA/MTC/051)

DATE OF ISSUED	JO/WO #	TYPE OF MAINTENANCE	DATE OF ACCOMPLISHED
12 May 2023	WO/052-SNS/V/2023	400Hrs, Add.Airframe & 100Hrs Eng.	
A/C Type		Mfg. Serial Number	A/C Registration
C208B		C208B-2341	PK-SNS
AIRCRAFT DATA			
Subject	Pos #	Serial Number (SN)	TTSN/TCSN
Engine	#1	PCE-PC1306	
	#2	-	
Propeller/Rotor	#1	081043	
	#2	-	
Landing Gear	NLG		
	LH MLG		
	RH MLG		

PACKAGE COVERED

No	Subject	Qty	Remark
1	Non-Routine Card	2	
2	Inspection Card	1	
3	Work Order	1	
4	Summary Inspection List	1	
5	Material and Tool List	-	
6	Escalation form	-	
7	CRS (SMI / Unscheduled Maintenance)	1	

INSPECTION CARD (IC) LIST (Finding during maintenance)

No	Taskcard Ref	Subject	Status		Name/ Sign & Stamp
			Open	Close	
<u>IC-001</u>					
<u>IC-002</u>					
<u>IC-003</u>					
<u>IC-004</u>					
<u>IC-005</u>					
<u>IC-006</u>					

<u>IC-007</u>					
<u>IC-008</u>					
<u>IC-009</u>					
<u>IC-010</u>					
<u>IC-011</u>					
<u>IC-012</u>					
<u>IC-013</u>					
<u>IC-014</u>					
<u>IC-015</u>					

Prepared by :
Technical Support

Checked by :
Chief Maintenance

Verified by :
Chief Inspector

Approved by :
Technical Manager


.....
Dwi M.


.....
Dodit


.....
Yanuar


.....
Istiono



SUMMARY INSPECTION ITEMS
(Form: SCA/MTC/050)

WO Ref: WO/052-SNS/V/2023

NO.	TASK CARD NO.	DESCRIPTION	DATE	EST MHR	NAME	STAMP
1	APPENDIX D01	PT6A-114A ENGINE GROUND RUN				
2	APPENDIX B07	PT6A-114A 100HRS MINOR INSPECTION				
3	APPENDIX C10	12 MTHS INSPECTION				
4	APPENDIX C04	400 HRS/24 MTHS INSPECTION				
5	APPENDIX C05	400 HRS/12 MTHS INSPECTION				
6	APPENDIX C03	200 HOURS/12 MTHS INSPECTION				
7	NRC-01	VACUUM RELIEF VALVE FILTER REPLACEMENT				
8	NRC-02	CENTRAL AIR FILTER REPLACEMENT				
9	SCA/MTC/023	EMERGENCY EQUIPMENT CHECKLIST				



PT. SMART CAKRAWALA AVIATION

CERTIFICATE RETURN TO SERVICE
SCHEDULED MAINTENANCE INSPECTION
(CRS-SMI)

A/C TYPE	: CESSNA 208B		TTSN	:
A/C REG	: PK-SNS		TCSN	:
MSN	: C208B-2341		DATE	:
TYPE OF INSPECTION	: INSPECTION 400HOURS, ADD A/F INSP.&ENGINE INSP.			
DUE AT	: 6679 HOURS			
REFF	: MP C208B ISSUED 01			
EXCEPTION				
AUTHORIZED PERSON				
I hereby certify that this aircraft has been maintained accordance with CASR and Maintenance Program. Aircraft safe and airworthy for flight				
NAME	CAT	AMEL/OTR NO	SIGN&STAMP	DATE
	AIRFRAME & POWER PLANT			
	EIRA			
THE NEXT DUE TYPE OF INSPECTION	:			
DUE AT	: HOURS			
Form: SCA/MTC/049				



NON ROUTINE CARD
(Form: SCA/MTC/047)

1. JO/WO #	2. DATE	3. MTC TYPE	4. A/C REG/MSN
WO/052-SNS/V/2023		REPLACEMENT COMPONENT	PK-SNS
5. CARD #	6. ATA SPEC	7. TRADE	8. STA
#01	37		
9. ZONE	10. PANEL		

11. DESCRIPTION

PERFORM VACUUM SYSTEM CENTRAL AIR FILTER REPLACEMENT

P/N: D9-18-1 / C294502-0201

REFERENCE	<input checked="" type="checkbox"/> AMM Ch. 37-10-00-960	<input type="checkbox"/> EMM Ch	<input type="checkbox"/> OTHER
RII (*)	<input type="checkbox"/> Y	<input checked="" type="checkbox"/> N	MHR :

12. RESULT				MECH	ENG	INSP (*)
Performed at A/C TT : A/C TC /LDG :						
FINDING	<input type="checkbox"/> Y	<input type="checkbox"/> N	ACT MHR :	DATE/TIME (DD/MM/YY)		
INSPECTION CARD (IC) #						

13. PARTS REQUIRED

DESCRIPTION	PART NO	QTY	REMARK	
			STOCK	STATUS
FILTER ELEMENT	D9-18-1 / C294502-0201	1		

14. TOOLS REQUIRED

DESCRIPTION	PART NO / MODEL	NEXT CALIBRATION DATE	STATUS



NON ROUTINE CARD
(Form: SCA/MTC/047)

1. JO/WO #	2. DATE	3. MTC TYPE	4. A/C REG/MSN
WO/052-SNS/V/2023		REPLACEMENT COMPONENT	PK-SNS
5. CARD #	6. ATA SPEC	7. TRADE	8. STA
#02	37		
9. ZONE	10. PANEL		

11. DESCRIPTION

PERFORM VACUUM RELIEF VALVE FILTER REPLACEMENT
P/N: B3-5-1 / C482001-0202

REFERENCE	<input checked="" type="checkbox"/> AMM Ch. 37-10-00-961	<input type="checkbox"/> EMM Ch	<input type="checkbox"/> OTHER
RII (*)	<input type="checkbox"/> Y	<input checked="" type="checkbox"/> N	MHR :

12. RESULT				MECH	ENG	INSP (*)
Performed at A/C TT : A/C TC /LDG :						
FINDING	<input type="checkbox"/> Y	<input type="checkbox"/> N	ACT MHR :	DATE/TIME (DD/MM/YY)		
INSPECTION CARD (IC) #						

13. PARTS REQUIRED

DESCRIPTION	PART NO	QTY	REMARK	
			STOCK	STATUS
FILTER ELEMENT	B3-5-1 / C482001-0202	1		

14. TOOLS REQUIRED

DESCRIPTION	PART NO / MODEL	NEXT CALIBRATION DATE	STATUS

VACUUM DISTRIBUTION - INSPECTION/CHECK

1. General

A. This section has the inspections and checks necessary to keep the vacuum distribution system in a serviceable condition.

TASK 37-10-00-960

2. Vacuum System Central Air Filter Discard

CAUTION: Do not operate the vacuum system with the filter removed or a vacuum line disconnected. Dust and other foreign objects can enter the system and damage the vacuum operated instruments.

A. General

(1) This task gives the instructions to discard the vacuum system central air filter.

B. Special Tools

(1) None

C. Access

(1) None

D. Discard the Vacuum System Central Air Filter.

(1) Remove the vacuum system central air filter. Refer to Chapter 12, [Vacuum System Central Air Filter - Servicing](#).
(a) Discard the filter.

(2) Install a new vacuum system central air filter. Refer to Chapter 12, [Vacuum System Central Air Filter - Servicing](#).

E. Restore Access

(1) None

END OF TASK

TASK 37-10-00-961

3. Vacuum Relief Valve Filter Discard

CAUTION: Do not operate the vacuum system with the filter removed or a vacuum line disconnected. Dust and other foreign objects can enter the system and damage the vacuum operated instruments.

A. General

(1) This task gives the instructions to discard the vacuum relief valve filter.

B. Special Tools

(1) None

C. Access

(1) None

D. Discard the Vacuum Relief Valve Filter.

(1) Get access to the relief valve behind the attitude gyro.
(2) Carefully stretch the foam element filter over the top of the retaining bezel.
(3) Remove the filter from the relief valve and discard it.
(4) Stretch a new relief valve filter over the top of the retaining bezel.
(5) Make sure that the filter is secure on the relief valve.

E. Restore Access

(1) None

END OF TASK

VACUUM SYSTEM CENTRAL AIR FILTER - SERVICING

1. General

A. The vacuum system central air filter keeps dust and dirt from entering the vacuum operated instruments.

CAUTION: Do not operate vacuum system with filter removed or vacuum line disconnected, as dust and other foreign matter may enter the system and damage the vacuum operated instruments.

B. Refer to [Chapter 5, Inspection Time Limits](#) for filter inspection intervals. Replace filter element when damaged and whenever it becomes sufficiently clogged to cause suction gage reading to drop below 4.5 inches Hg (mercury).

CAUTION: Smoking during system operation will cause premature filter clogging.

2. Servicing

A. Remove Air Filter (Refer to [Figure 301](#)).


- (1) Unscrew bolt and washer from bottom of central air filter.
- (2) Remove central air filter from filter bracket.
- (3) Inspect for damage, deterioration and contamination. Clean or replace as required.

B. Install Air Filter (Refer to [Figure 301](#)).

- (1) Seat central air filter up and into filter bracket.
- (2) Secure central air filter to filter bracket using bolt and washer.
- (3) Check central air filter for unobstructed flow. A properly functioning filter should allow a reading of at least 4.5 inches Hg (mercury) on the instrument panel suction gage.

Figure 301 : Sheet 1 : Vacuum System Central Air Filter Servicing

A22863

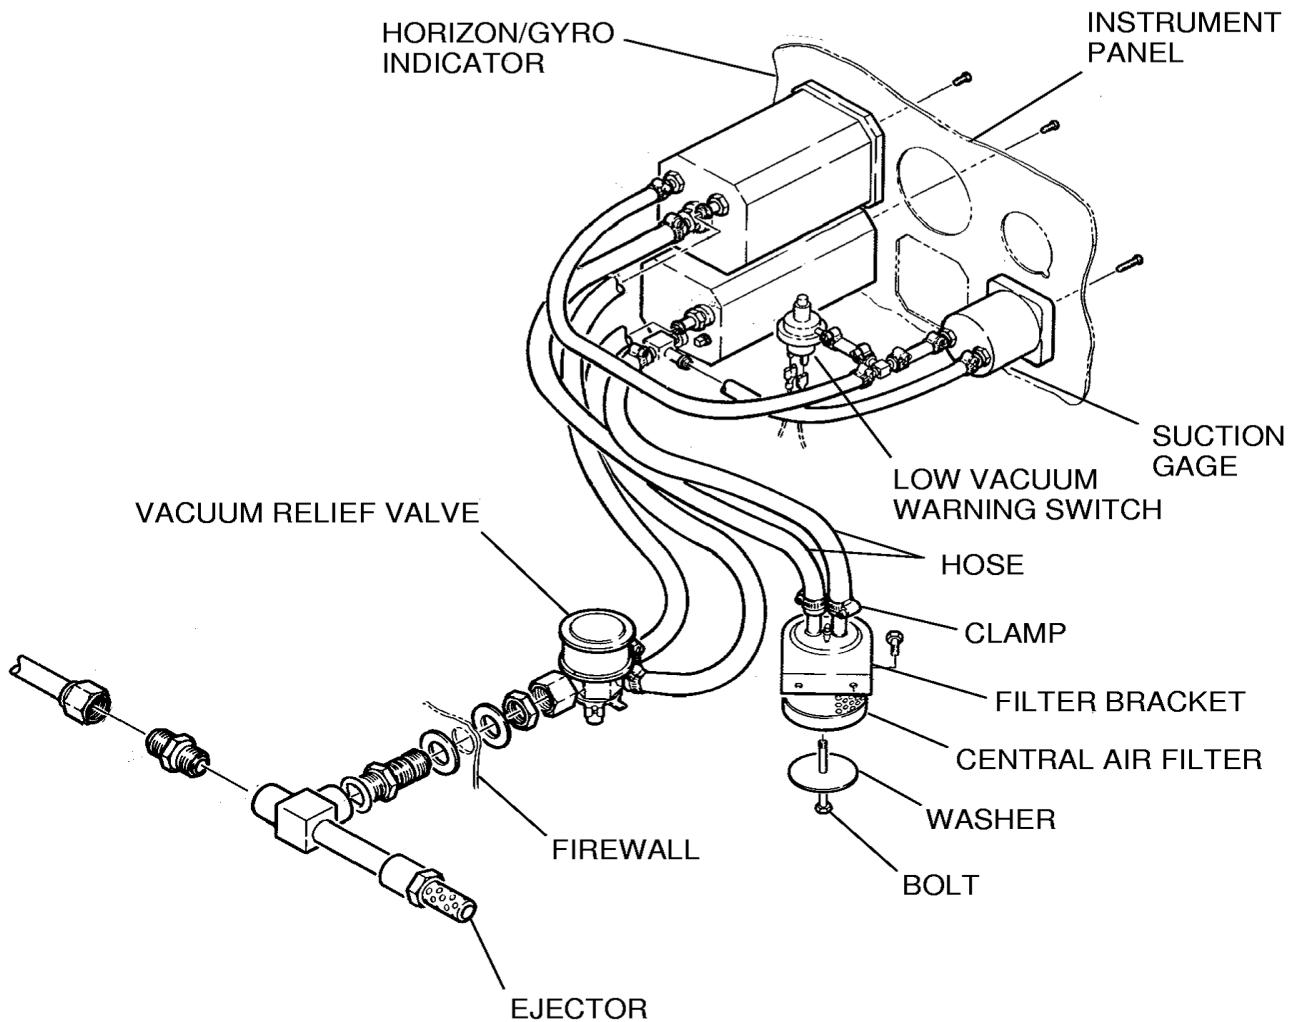

26141069



MAINTENANCE PROGRAM

CESSNA 208/208B

Appendix B07 – PT6A-114A Engine Run Performance Sheet

Reg. Mark : PK -

WO/FML No. :

PRE – INSPECTION	
Location	
Date	
Cycle	
Filed Barometric	
OAT	
Altitude	

POST – INSPECTION	
Location	
Date	
Cycle	
Filed Barometric	
OAT	
Altitude	

PRE – INSPECTION		
	Target	Actual
Tq		
Np		
ITT	°C	°C
Ng	%	%
Wf		
Oil Press	°C	°C
Oil Temp	°C	°C
Start Temp	°C	°C

POST – INSPECTION		
	Target	Actual
Tq		
Np		
ITT	°C	°C
Ng	%	%
Wf		
Oil Press	°C	°C
Oil Temp	°C	°C
Start Temp	°C	°C

Engine Run Up Checks							
Inertial	<input type="checkbox"/>	EPL	<input type="checkbox"/>	OVG	<input type="checkbox"/>	Stby Alt	<input type="checkbox"/>
NOTE:							
1. Inertial Separator at Torque 400 ft-lbs.		3. EPL check can't exceed 4% Ng per second.		5. Low idle at 52.5 – 53.5% 40Amps.		2. Inertial Separator at Torque 1500 ft-lbs.	
		4. Standby Alt at 80% Ng.		6. High idle at 64 - 66% Ng 40Amps.			

Engine Performance Target Table Cessna C208

OAT (°C)	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Tq (ft.lbs)	1865	1865	1865	1865	1865	1865	1865	1865	1865	1865	1865	1865	1865	1865	1865
Np	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
ITT (°C)	772	775	778	780	785	790	793	795	797	800	800	800	802	805	810
Ng (%)	98.5	98.5	99	99	99.1	99.2	99.4	99.5	99.5	100	100	100.2	100.5	100.7	100.9
WF (PPH)	450	450	450	450	450	450	450	450	450	450	450	450	448	448	446

Note:

1. Make sure that inertial separator in normal condition, no bleed air extracted from the engine and air condition OFF.
2. This table only applies to altitude 0-500 feet MSL. For higher altitude, refer to EMM 72-00-00.
3. Max fuel flow is 465 lb/hr fuel flow is not more than 15 lbs/hr higher than the value shown in table.
4. If parameters are outside the target performance table to EMM chapter 71-00-00.

REMARKS:

PERFORMED BY			
Name	Sign & Stamp	Date	Location



**EMERGENCY EQUIPMENT
LIST
INSPECTION & MONITOR**

**PT. SMART CAKRAWALA
AVIATION
DEPARTMENT TEKNIK
Form: SCA/MTC/023**

DATE :	A/C REG : PK-SNS
A/C TYPE : C208B	CHECKER : SIGN:

No.	Description	P/N	S/N	Next Insp.	Remarks
1	Pilot Life Vest				
2	Co-Pilot Life Vest				
3	Pax Life Vest				
4	Pax Life Vest				
5	Pax Life Vest				
6	Pax Life Vest				
7	Pax Life Vest				
8	Pax Life Vest				
9	Pax Life Vest				
10	Pax Life Vest				
11	Pax Life Vest				
12	Pax Life Vest				
13	Firt Aid Kit				
14	Crash Axe Installed				
15	Fire Extinguisher				
16	Life Raft (If Installed)				
17	Survival Kit (If Installed)				
OTHERS					



Additional Work Sheet

400Hours,Add.A/F

Insp.&100Hrs Eng.

Aircraft Registration: **PK-SNS**

WO# Nr: WO/052-SNS/V/2023

Parts Used Sheet

1

Special Tool Used



Additional Work Sheet

400Hours,Add.A/F

Insp.&100Hrs Eng.

Aircraft Registration: **PK-SNS**

WO# Nr: WO/052-SNS/V/2023

Parts Used Sheet

2

Part Used