



**AIRCRAFT CHECK WORK SUMMARY**  
(Form: SCA/MTC/051)

DATE OF ISSUED	JO/WO #	TYPE OF MAINTENANCE	DATE OF ACCOMPLISHED		
21-Oct-2021	WO/021-SNW/X/2021	Inspection Doc. 08 & Add Task			
A/C Type		Mfg. Serial Number	A/C Registration		
C208B		C208B-5587	PK-SNW		
<b>AIRCRAFT DATA</b>					
Subject	Pos #	Serial Number (SN)	TTSN/TCSN		
Engine	#1	PCE-VA0651			
	#2	-			
Propeller/Rotor	#1	190815			
	#2	-			
Landing Gear	NLG				
	LH MLG				
	RH MLG				
<b>PACKAGE COVERED</b>					
No	Subject	Qty	Remark		
1	Non-Routine Card	-			
2	Inspection Card	1			
3	Work Order	1			
4	Summary Inspection List	1			
5	Material and Tool List	-			
6	Escalation form	-			
7	CRS (SMI / Unscheduled Maintenance)	1			
<b>INSPECTION CARD (IC) LIST (Finding during maintenance)</b>					
No	Taskcard Ref	Subject	Status		Name/ Sign & Stamp
			Open	Close	
<u>IC-001</u>					
<u>IC-002</u>					
<u>IC-003</u>					
<u>IC-004</u>					
<u>IC-005</u>					
<u>IC-006</u>					

<u>IC-007</u>					
<u>IC-008</u>					
<u>IC-009</u>					
<u>IC-010</u>					
<u>IC-011</u>					
<u>IC-012</u>					
<u>IC-013</u>					
<u>IC-014</u>					
<u>IC-015</u>					

Prepared by :  
Technical Support

Checked by :  
Chief Maintenance

Verified by :  
Chief Inspector

Approved by :  
Technical Manager

.....

.....

.....

.....



## SUMMARY INSPECTION ITEMS (Form: SCA/MTC/050)

WO Ref: WO/021-SNW/X/2021

NO.	TASK CARD NO.	DESCRIPTION	DATE	EST MHR	NAME	STAMP
1	B03	PT6A-140 ENGINE GROUND RUN PERFORMANCE				
2	CHAPTER 12	INSPECTION DOCUMENT 06				
3	CHAPTER 13	INSPECTION DOCUMENT 07				
4	CHAPTER 14	INSPECTION DOCUMENT 08				
5	CHAPTER 51	ENGINE PT6A-140 100 HOUR INSPECTION/ MINOR INSPECTION				
6	CHAPTER 52	ENGINE PT6A-140 200 HOUR INSPECTION				
7	CHAPTER 53	ENGINE PT6A-140 200 HOURS/ 6 MONTHS INSPECTION				
8	CHAPTER 54	ENGINE PT6A-140 400 HOUR INSPECTION				
9	CHAPTER 55	ENGINE PT6A-140 600 HOUR INSPECTION				
10	NRC-001	REPLACE VACUUM SYSTEM CENTRAL AIR FILTER DISCARD				
11	NRC-002	REPLACE VACUUM RELIEF VALVE FILTER DISCARD				
12	SCA/MTC/ 023	EMERGENCY EQUIPMENT CHECK				



PT. SMART CAKRAWALA AVIATION

## CERTIFICATE RETURN TO SERVICE

### SCHEDULED MAINTENANCE INSPECTION (CRS-SMI)

A/C TYPE : CESSNA 208B

TTSN :

A/C REG : PK-SNW

TCSN :

MSN : C208B-5579

DATE :

TYPE OF INSPECTION : INSPECTION DOC. 08 & ADD TASK

DUE AT : 1200 HOURS

REF : MP C208B REV. 10

EXCEPTION

#### AUTHORIZED PERSON


I hereby certify that this aircraft has been maintained accordance with CASR and Maintenance Program.  
Aircraft safe and airworthy for flight

NAME	CAT	AMEL/OTR NO	SIGN&STAMP	DATE
	AIRFRAME & POWER PLANT			
	EIRA			

THE NEXT DUE TYPE OF INSPECTION :

DUE AT :

**Form: SCA/MTC/049**

	<b>INSPECTION CARD</b> <b>(Form: SCA/MTC/ 048)</b>	TECHNICAL DEPARTMENT
---	---	-------------------------

1. CARD #	2. JO/WO #	3. ORIGINATOR	4. CARD REF	5. DATE
6. A/C REG/MSN	7. A/C TYPE	8. TRADE	12. VENDOR ORDER #	
9. ZONE	10. STA	11. MTC TYPE		

13. DESCRIPTION/DEFECT-IF FINDING OF CPCP INSPECTION, PLEASE COMPLETE SET. 20	14 PPC/ENG	15 DATE

16. CORRECTIVE ACTION	17 MECH	18 ENG. LIC	19 DATE
Performed at A/C TT : ..... A/C TC /LDG : .....			

20. CORROSION INFORMATION					
LOCATION	CAUSE OF DAMAGE				
	<input type="checkbox"/> Environment				
	<input type="checkbox"/> Internal Leakage				
CORROSION <input type="checkbox"/> Isolated <input type="checkbox"/> Widespread	<input type="checkbox"/> Chemical Spill				
CORROSION LVL <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	<input type="checkbox"/> LAV/Galley Spill				
PROPOSED ACTION <input type="checkbox"/> Doublers	<input type="checkbox"/> Blocked Drain				
<input type="checkbox"/> Others	<input type="checkbox"/> Wet Insulation Blanket				
.....	<input type="checkbox"/> Other				
21. If the defect is RII, Please Sign this card finally by RII Inspector				INSP	DATE
NOTICE OF INSPECTOR					

22. PARTS REQUIRED						
PART DESCRIPTION	PART NO	QTY	SERIAL NO		STATUS	
			ON	OFF	CLOSE	OPEN

23. TOOLS REQUIRED			
DESCRIPTION	PART NO. / MODEL	NEXT CALIBRATION DATE	STATUS



# MAINTENANCE PROGRAM

## CESSNA C208/C208B

### Appendix B03 – PT6A-140 Engine Run Performance Sheet

Reg. Mark : PK - WO/FML No. :

PRE – INSPECTION	
Location	
Date	
Cycle	
Filed Barometric	
OAT	
Altitude	

POST – INSPECTION	
Location	
Date	
Cycle	
Filed Barometric	
OAT	
Altitude	

PRE – INSPECTION		
	Target	Actual
Tq		
Np		
ITT	°C	°C
Ng	%	%
Wf		
Oil Press		°C
Oil Temp		°C
Start Temp		°C

POST – INSPECTION		
	Target	Actual
Tq		
Np		
ITT	°C	°C
Ng	%	%
Wf		
Oil Press		°C
Oil Temp		°C
Start Temp		°C

Engine Run Up Checks					
Inertial <input type="checkbox"/>	EPL <input type="checkbox"/>	OVG <input type="checkbox"/>	Stby Alt <input type="checkbox"/>	BOV <input type="checkbox"/>	Brake <input type="checkbox"/> Randomown <input type="checkbox"/>
<b>NOTE:</b> <ol style="list-style-type: none"> <li>1. Brake system at Torque 2000 ft-lbs.</li> <li>2. Inertial Separator at Torque 400 ft-lbs.</li> <li>3. EPL check can't exceed 4% Ng per second.</li> <li>4. Standby Alt at 80% Ng.</li> <li>5. Low idle at 55.5 - 57% 40Amps.</li> <li>6. High idle at 64 - 66% Ng 40Amps</li> </ol>					

Engine Performance Target Table (Cessna C208B EX)

OAT (°C)	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Tq (ft.lbs)	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397	2397
Np	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
ITT (°C)	835	837	839	841	841	841	841	841	841	842	843	844	846	846	846
Ng (%)	102.7	102.7	102.7	102.7	102.7	102.7	102.7	102.6	102.6	102.6	102.6	102.6	102.6	102.6	102.5
WF (PPH)	578	578	578	578	578	578	578	570	565	565	560	560	555	548	548

**Note:**

1. Make sure that inertial separator in normal condition, no bleed air extracted from the engine and air condition OFF.
2. This table only applies to altitude 0-500 feet MSL. For higher altitude, refer to EMM 72-00-00.
3. Max fuel flow is 580 lb/hr fuel flow is not more than 15 lbs/hr higher than the value shown in table.
4. If parameters are outside the target performance table to EMM chapter 71-00-00.

**REMARKS:**

**PERFORMED BY**

Name	Sign & Stamp	Date	Location



# MAINTENANCE PROGRAM CESSNA C208/C208B

## Chapter 12 – Inspection Document 06

Reg. Mark	:	PK - _____	Date	:	_____
MSN	:	_____	Station	:	_____
TSN / CSN	:	_____	WO No.	:	_____

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
A110001	ALL	Interior and Exterior Placard and Decal Detailed Inspection Task 11-00-00-220		
D121001	121	Brake System Servicing Task 12-10-01-610		
D121003	710	Shimmy Damper Servicing Task 12-10-01-611		
C122101	700	Landing Gear Lubrication Task 12-21-03-640		
B236001	343 375 376 571 671	Static Discharge System Functional Check Task 23-60-00-720		
A255101	251 252 255 256 257 258	Cargo Nets Detailed Inspection Task 25-51-00-220		
C270001	215 216 226 373 374 503 525 603 625	Flight Controls Lubrication Task 27-00-00-640		
B273101	211 212 503	Stall Warning System Operational Check Task 27-31-00-710		
C275001	525 527 625 627	Flap Tracks and Rollers Lubrication Task 27-50-00-640		
B281001	575 675	Fuel Vent Line Float Valve Operational Check Task 28-10-03-710		
A281001	521 621	Fuel Filler Assembly Detailed Inspection Task 28-10-01-220		
B301003	122 AUX	Bleed Air Pressure Regulator Functional Check (without TKS and not incorporating CAB93-2) Task 30-10-00-720		
B322001	710	Shimmy Damper Functional Check Task 32-20-02-720		





# **MAINTENANCE PROGRAM** **CESSNA C208/C208B**

## **Chapter 12 – Inspection Document 06**

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
B341101	AUX	Pitot Tube Heaters Operational Check Task 34-11-00-710		
A353001	256	Oxygen Mask Detailed Inspection Task 35-30-00-220		
B761003	AUX	Emergency Power Lever Annunciator Light (EPL) Operational Check Task 76-10-01-710		
*** End of Inspection Document 06 Items ***				

PERSONNEL PARTICIPATING IN THIS INSPECTION			
NAME	POSITION	SIGNATURE	LICENSE NUMBER

### **RETURN TO SERVICE**

The work recorded above has been carried out in accordance with the requirements of the Civil Aviation Safety Regulation for the time being in force and in that respect the aircraft is consider fit for Release to Service.

Name : \_\_\_\_\_ Stamp : \_\_\_\_\_  
Signature : \_\_\_\_\_ Place/Date : \_\_\_\_\_



# MAINTENANCE PROGRAM CESSNA C208/C208B

## Chapter 13 – Inspection Document 07

Reg. Mark	:	PK - _____	Date	:	_____
MSN	:	_____	Station	:	_____
TSN / CSN	:	_____	WO No.	:	_____

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
A243601	121	Standby Alternator Detailed Inspection Task 24-36-00-220		
B251001	221 232	Inertia Reel Operational Check Task 25-10-00-710		
B255201	901 902 903 904 905 906	Cargo Pod Drains Operational Check Task 25-52-00-710		
A261001	121 122	Engine Fire Detection System General Visual Inspection Task 26-10-00-210		
C271001	211 212 217 218 233 234 253 254 251 252 551 571 651 671	Aileron Trim System Lubrication Task 27-10-02-640		
B271005	551 571 651 671	Aileron Trim Tab (Free Play) Functional Check Task 27-10-02-720		
B273003	371 372 375 376	Elevator Trim Tab (Free Play) Functional Check Task 27-30-02-720		
D282101	130	Firewall Mounted Fuel Filter Servicing Task 28-21-00-610		
B282103	213 214 220	Firewall Fuel Shutoff Valve Control Operational Check Task 28-21-00-711		
C282301	231 232 511 611	Wing Shutoff Valve Linkage Lubrication Task 28-23-00-640		
B284101	ENG	Fuel Reservoir Warning System Operational Check Task 28-41-00-710		
B301001	122 AUX	Bleed Air Pressure Regulator Functional Check (Airplanes with de-ice boots installed) Task 30-10-00-720		
A353003	256	Portable Oxygen Cylinder Detailed Inspection Task 35-30-00-221		



# MAINTENANCE PROGRAM CESSNA C208/C208B

## Chapter 13 – Inspection Document 07

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
B611101	110	McCauley Propeller Functional Check Task 61-11-00-720		
A712001	130	Engine Mounts and Firewall Detailed Inspection Task 71-20-00-220		
A716001	130	Inertial Air Separator Detailed Inspection Task 71-60-00-220		
B761001	130 211 212 ENG	Engine Controls Functional Check Task 76-10-00-72		
A801001	130	Starter-Generator (Part Number 23081 Series only) Detailed Inspection Task 80-10-00-220		
*** End of Inspection Document 07 Items ***				

PERSONNEL PARTICIPATING IN THIS INSPECTION			
NAME	POSITION	SIGNATURE	LICENSE NUMBER

### RETURN TO SERVICE

The work recorded above has been carried out in accordance with the requirements of the Civil Aviation Safety Regulation for the time being in force and in that respect the aircraft is considered fit for Release to Service.

Name : \_\_\_\_\_ Stamp : \_\_\_\_\_  
Signature : \_\_\_\_\_ Place/Date : \_\_\_\_\_



# MAINTENANCE PROGRAM CESSNA C208/C208B

## Chapter 14 – Inspection Document 08

Reg. Mark	:	PK - _____	Date	:	_____
MSN	:	_____	Station	:	_____
TSN / CSN	:	_____	WO No.	:	_____

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
B215001	121 122	Compressor Drive Belt Functional Check Task 21-50-00-720		
A322001	710	Nose Landing Gear Detailed Inspection Task 32-20-00-220		
*** End of Inspection Document 08 Items ***				

PERSONNEL PARTICIPATING IN THIS INSPECTION			
NAME	POSITION	SIGNATURE	LICENSE NUMBER

### RETURN TO SERVICE

The work recorded above has been carried out in accordance with the requirements of the Civil Aviation Safety Regulation for the time being in force and in that respect the aircraft is consider fit for Release to Service.

Name	:	_____	Stamp	:	_____
Signature	:	_____	Place/Date	:	_____



# MAINTENANCE PROGRAM CESSNA C208/C208B

## Chapter 51 – Engine PT6A-140 100 Hours/Minor Inspection

Reg. Mark	:	PK - _____	Date	:	_____
MSN	:	_____	Station	:	_____
TSN / CSN	:	_____	WO No.	:	_____

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
F710001	130	Do a check of the FCU manual override system for static operation. For the engines installed with a manual override system only.		
F710003	130	Do a compressor performance recovery wash		
F720000	130	Do a visual inspection of the Control Linkages and wiring.		
F720001	130	Do a visual inspection of the engine exhaust duct welds.		
F720002	130	Do a visual inspection of the engine exhaust duct for cracks.		
F720003	130	Do a visual inspection of the gas generator case and the center fireseal.		
F720004	130	Do a visual inspection of the rear fireseal mounting ring.		
F722001	130	Do a visual inspection of the air inlet screen.		
F723000	130	Do a visual inspection with a mirror or a borescope inspection of the First-stage Compressor Rotor and the inlet case for corrosion		
F725005	130	Do a detailed inspection of the turbine exhaust duct.		
F731002	130	Do a check for the fuel pump installation and leaks.		
F731003	130	Do a check of the oil-to- fuel heater installation		
F731035	130	Do a visual Inspection of the Fuel - Oil Heat Exchanger Fuel Filter Element  <b>(CLEANING / REPLACEMENT)</b> P/N OFF: _____ P/N ON: _____		



## MAINTENANCE PROGRAM CESSNA C208/C208B

### Chapter 51 – Engine PT6A-140 100 Hours/Minor Inspection

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
F731006	130	Do a check of the drain valve for installation and leaks		
F731007	130	Do a check of the flow divider for installation and leaks.		
F731008	130	Do a visual inspection of the P3 filter and drain valve.		
F731015	130	Do a visual inspection of Fuel Pump outlet filter.  <b>(CLEANING / REPLACEMENT)</b> P/N OFF: _____ P/N ON: _____		
F731018	130	Clean or replace the P3 filter based on condition, service experience or environment. <b>Note:</b> If corrossions are found, replace filter.		
F732001	130	Do a check of the FCU for installation, linkages and pneumatic tubes.		
F792000	130	Inspect and clean oil filter for debris.		
*** End of Engine PT6A-140 100 Hours Inspection Items ***				

PERSONNEL PRITICIPATING IN THIS INSPECTION			
NAME	POSITION	SIGNATURE	LICENSE NUMBER

RETURN TO SERVICE			
<p>The work recorded above has been carried out in accordance with the requirements of the Civil Aviation Safety Regulation for the time being in force and in that respect the aircraft is consider fit for Release to Service.</p>			
Name	: _____	Stamp	: _____
Signature	: _____	Place/Date	: _____



# **MAINTENANCE PROGRAM** **CESSNA C208/C208B**

## **Chapter 52 – Engine PT6A-140 200 Hours Inspection**

Reg. Mark	:	PK - _____	Date	:	_____
MSN	:	_____	Station	:	_____
TSN / CSN	:	_____	WO No.	:	_____

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
F793001	130	Do a visual inspection of the chip detector for debris.		
*** End of Engine PT6A-140 200 Hours Inspection Items ***				

PERSONNEL PARTICIPATING IN THIS INSPECTION			
NAME	POSITION	SIGNATURE	LICENSE NUMBER

### **RETURN TO SERVICE**

The work recorded above has been carried out in accordance with the requirements of the Civil Aviation Safety Regulation for the time being in force and in that respect the aircraft is consider fit for Release to Service.

Name	:	_____	Stamp	:	_____
Signature	:	_____	Place/Date	:	_____



# **MAINTENANCE PROGRAM** **CESSNA C208/C208B**

## **Chapter 53 – Engine PT6A-140 200 Hours or 6 Months Inspection**

Reg. Mark	:	PK - _____	Date	:	_____
MSN	:	_____	Station	:	_____
TSN / CSN	:	_____	WO No.	:	_____

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
F793000	130	Do a visual inspection of the AGB internal scavenge oil pump inlet screen		
*** End of Engine PT6A- 140 200 Hours or 6 Months Inspection Items ***				

PERSONNEL PARTICIPATING IN THIS INSPECTION			
NAME	POSITION	SIGNATURE	LICENSE NUMBER

### **RETURN TO SERVICE**

The work recorded above has been carried out in accordance with the requirements of the Civil Aviation Safety Regulation for the time being in force and in that respect the aircraft is consider fit for Release to Service.

Name	:	_____	Stamp	:	_____
Signature	:	_____	Place/Date	:	_____





# MAINTENANCE PROGRAM CESSNA C208/C208B

## Chapter 54 – Engine PT6A-140 400 Hours Inspection

Reg. Mark	:	PK - _____	Date	:	_____
MSN	:	_____	Station	:	_____
TSN / CSN	:	_____	WO No.	:	_____

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
F724000	130	Do borescope inspection of hot section components.		
F731004	130	Do a leak test and a functional test of the fuel manifold adapter and nozzle assemblies.  <b>Note:</b> Engines ON fuel nozzle in-situ cleaning program (Ref. Task 71-00-00- 160-808). Test fuel nozzles and refurbish as necessary.		
F741001	130	Do a visual inspection of the ignition exciter.		
F741011	130	Do a visual inspection of the ignition cables.		
F742001	130	Do a functional check of the ignition cable.		
F742002	130	Do a visual inspection of the spark igniter/glow plugs. <b>Note:</b>  Examine initially at 200 Hours.		
*** End of Engine PT6A-140 400 Hours Inspection Items ***				

PERSONNEL PARTICIPATING IN THIS INSPECTION			
NAME	POSITION	SIGNATURE	LICENSE NUMBER

### RETURN TO SERVICE

The work recorded above has been carried out in accordance with the requirements of the Civil Aviation Safety Regulation for the time being in force and in that respect the aircraft is consider fit for Release to Service.

Name	:	_____	Stamp	:	_____
Signature	:	_____	Place/Date	:	_____



# **MAINTENANCE PROGRAM** **CESSNA C208/C208B**

## **Chapter 55 – Engine PT6A-140 600 Hours Inspection**

Reg. Mark	:	PK - _____	Date	:	_____
MSN	:	_____	Station	:	_____
TSN / CSN	:	_____	WO No.	:	_____

ITEM CODE NO.	ZONE	TASK	SIGNATURE	
			SIGN	STAMP
F731005		Do a visual inspection of the fuel pump inlet screen.		
F753001		Do a visual inspection of the compressor bleed valve.		
F793002		Do a functional check of the chip detector.		
*** End of Engine PT6A-140 600 Hours Inspection Items ***				

PERSONNEL PARTICIPATING IN THIS INSPECTION			
NAME	POSITION	SIGNATURE	LICENSE NUMBER

### **RETURN TO SERVICE**

The work recorded above has been carried out in accordance with the requirements of the Civil Aviation Safety Regulation for the time being in force and in that respect the aircraft is consider fit for Release to Service.

Name	:	_____	Stamp	:	_____
Signature	:	_____	Place/Date	:	_____



**NON ROUTINE CARD**  
(Form: SCA/MTC/047)

1. JO/WO #	2. DATE	3. MTC TYPE	4. A/C REG/MSN
WO/021-SNW/X/2021	21-OCT-2021	REPLACEMENT COMPONENT	PK-SNH
5. CARD #	6. ATA SPEC	7. TRADE	8. STA
#001	37		
9. ZONE	10. PANEL		

11. DESCRIPTION			
PERFORM VACUUM SYSTEM CENTRAL AIR FILTER REPLACEMENT P/N: D9-18-1 / C294502-0201			
REFERENCE	<input checked="" type="checkbox"/> AMM Ch. 37-10-00-960	<input type="checkbox"/> EMM Ch	<input type="checkbox"/> OTHER
RII (*)	<input type="checkbox"/> Y	<input checked="" type="checkbox"/> N	MHR :

12. RESULT		MECH	ENG	INSP (*)
Performed at A/C TT : ..... A/C TC /LDG : .....				
FINDING	<input type="checkbox"/> Y	<input type="checkbox"/> N	ACT MHR :	DATE/TIME (DD/MM/YY)
INSPECTION CARD (IC) #				

13. PARTS REQUIRED				
DESCRIPTION	PART NO	QTY	REMARK	
			STOCK	STATUS
FILTER ELEMENT	D9-18-1 / C294502-0201	1		

14. TOOLS REQUIRED			
DESCRIPTION	PART NO / MODEL	NEXT CALIBRATION DATE	STATUS



**NON ROUTINE CARD**  
(Form: SCA/MTC/047)

1. JO/WO #	2. DATE	3. MTC TYPE	4. A/C REG/MSN
WO/021-SNW/X/2021	21-OCT-2021	REPLACEMENT COMPONENT	PK-SNH
5. CARD #	6. ATA SPEC	7. TRADE	8. STA
#002	37		
9. ZONE	10. PANEL		

11. DESCRIPTION			
PERFORM VACUUM RELIEF VALVE FILTER REPLACEMENT P/N: B3-5-1 / C482001-0202			
REFERENCE	<input checked="" type="checkbox"/> AMM Ch. 37-10-00-961	<input type="checkbox"/> EMM Ch	<input type="checkbox"/> OTHER
RII (*)	<input type="checkbox"/> Y	<input checked="" type="checkbox"/> N	MHR :

12. RESULT		MECH	ENG	INSP (*)
Performed at A/C TT : ..... A/C TC /LDG : .....				
FINDING	<input type="checkbox"/> Y	<input type="checkbox"/> N	ACT MHR :	DATE/TIME (DD/MM/YY)
INSPECTION CARD (IC) #				

13. PARTS REQUIRED				
DESCRIPTION	PART NO	QTY	REMARK	
			STOCK	STATUS
FILTER ELEMENT	B3-5-1 / C482001-0202	1		

14. TOOLS REQUIRED			
DESCRIPTION	PART NO / MODEL	NEXT CALIBRATION DATE	STATUS

**VACUUM DISTRIBUTION - INSPECTION/CHECK****1. General**

- A. This section has the inspections and checks necessary to keep the vacuum distribution system in a serviceable condition.

**TASK 37-10-00-960****2. Vacuum System Central Air Filter Discard**

**CAUTION:** Do not operate the vacuum system with the filter removed or a vacuum line disconnected. Dust and other foreign objects can enter the system and damage the vacuum operated instruments.

## A. General

- (1) This task gives the instructions to discard the vacuum system central air filter.

## B. Special Tools

- (1) None

## C. Access

- (1) None

## D. Discard the Vacuum System Central Air Filter.

- (1) Remove the vacuum system central air filter. Refer to Chapter 12, [Vacuum System Central Air Filter - Servicing](#).  
 (a) Discard the filter.  
 (2) Install a new vacuum system central air filter. Refer to Chapter 12, [Vacuum System Central Air Filter - Servicing](#).

## E. Restore Access

- (1) None

**END OF TASK****TASK 37-10-00-961****3. Vacuum Relief Valve Filter Discard**

**CAUTION:** Do not operate the vacuum system with the filter removed or a vacuum line disconnected. Dust and other foreign objects can enter the system and damage the vacuum operated instruments.

## A. General

- (1) This task gives the instructions to discard the vacuum relief valve filter.

## B. Special Tools

- (1) None

## C. Access

- (1) None

## D. Discard the Vacuum Relief Valve Filter.

- (1) Get access to the relief valve behind the attitude gyro.  
 (2) Carefully stretch the foam element filter over the top of the retaining bezel.  
 (3) Remove the filter from the relief valve and discard it.  
 (4) Stretch a new relief valve filter over the top of the retaining bezel.  
 (5) Make sure that the filter is secure on the relief valve.

## E. Restore Access

- (1) None

**END OF TASK**

## VACUUM SYSTEM CENTRAL AIR FILTER - SERVICING

### 1. General

A. The vacuum system central air filter keeps dust and dirt from entering the vacuum operated instruments.

**CAUTION:** Do not operate vacuum system with filter removed or vacuum line disconnected, as dust and other foreign matter may enter the system and damage the vacuum operated instruments.

B. Refer to [Chapter 5, Inspection Time Limits](#) for filter inspection intervals. Replace filter element when damaged and whenever it becomes sufficiently clogged to cause suction gage reading to drop below 4.5 inches Hg (mercury).

**CAUTION:** Smoking during system operation will cause premature filter clogging.

### 2. Servicing

A. Remove Air Filter (Refer to [Figure 301](#)).


- (1) Unscrew bolt and washer from bottom of central air filter.
- (2) Remove central air filter from filter bracket.
- (3) Inspect for damage, deterioration and contamination. Clean or replace as required.

B. Install Air Filter (Refer to [Figure 301](#) ).

- (1) Seat central air filter up and into filter bracket.
- (2) Secure central air filter to filter bracket using bolt and washer.
- (3) Check central air filter for unobstructed flow. A properly functioning filter should allow a reading of at least 4.5 inches Hg (mercury) on the instrument panel suction gage.

Figure 301 : Sheet 1 : Vacuum System Central Air Filter Servicing

A22863

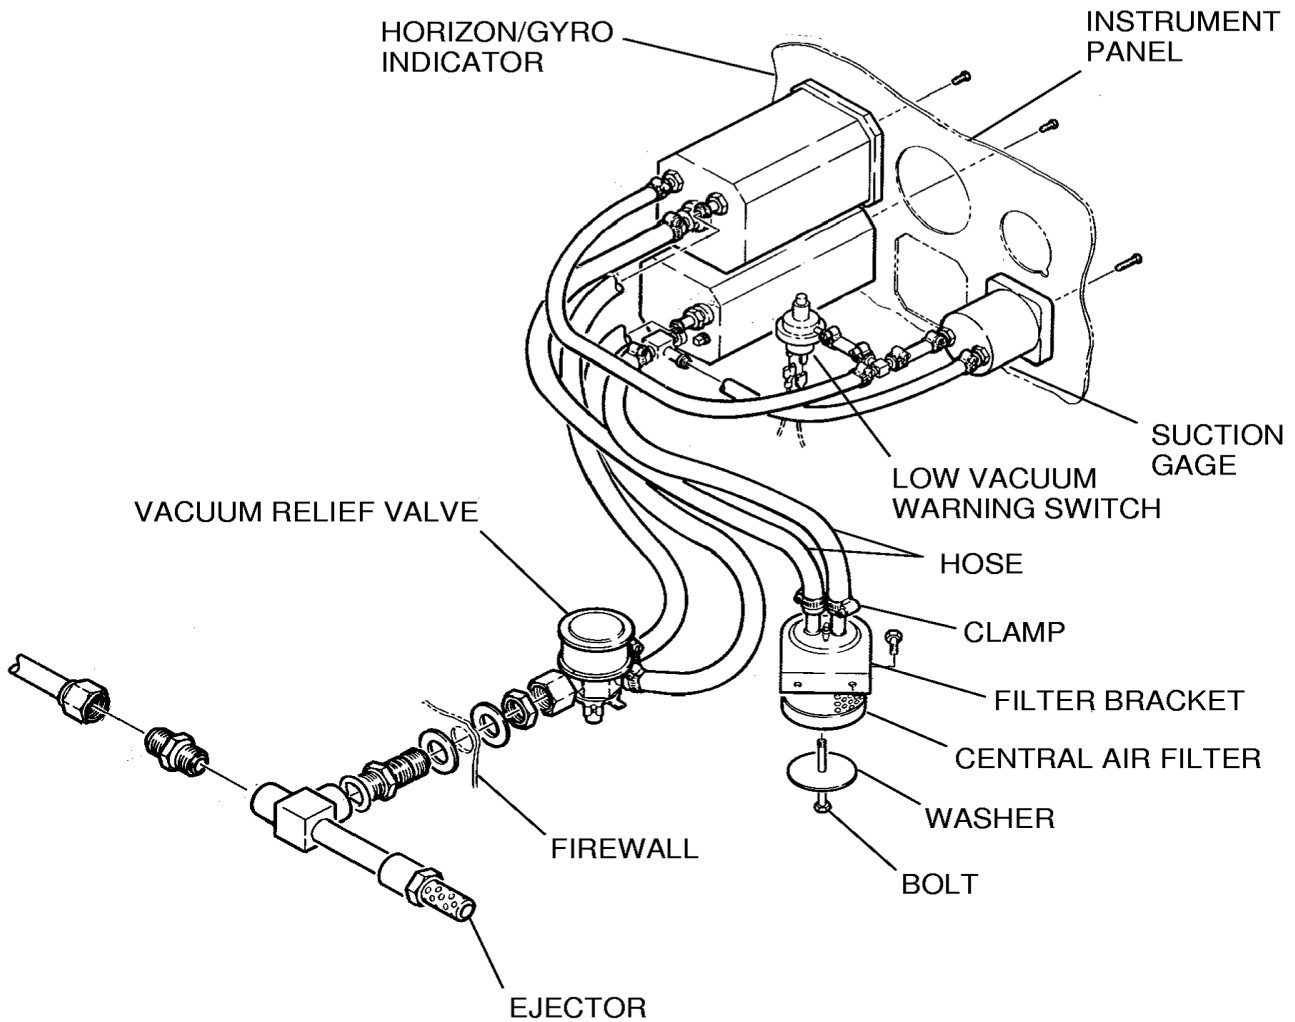

26141069



# **EMERGENCY EQUIPMENT LIST INSPECTION & MONITOR**

**PT. SMART CAKRAWALA  
AVIATION**  
DEPARTMENT TEKNIK  
Form: SCA/MTC/023

<b>DATE :</b>	<b>A/C REG :</b>
<b>A/C TYPE :</b>	<b>CHECKER : SIGN:</b>

No.	Description	P/N	S/N	Next Insp.	Remarks
1	Pilot Life Vest				
2	Co-Pilot Life Vest				
3	Pax Life Vest				
4	Pax Life Vest				
5	Pax Life Vest				
6	Pax Life Vest				
7	Pax Life Vest				
8	Pax Life Vest				
9	Pax Life Vest				
10	Pax Life Vest				
11	Pax Life Vest				
12	Pax Life Vest				
13	Firt Aid Kit				
14	Crash Axe Installed				
15	Fire Extinguisher				
16	Life Raft (If Installed)				
17	Survival Kit (If Installed)				
<b>OTHERS</b>					





[illegible]